




**ROMANSTONE®**  
INTERLOCKING PAVING STONES

# COBBLE

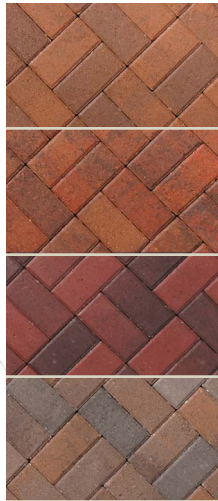


*AUTUMN HICKORY BLEND*

*HARVEST BLEND*

*TERRA COTTA BLEND*

*TIMBERWOOD BLEND*

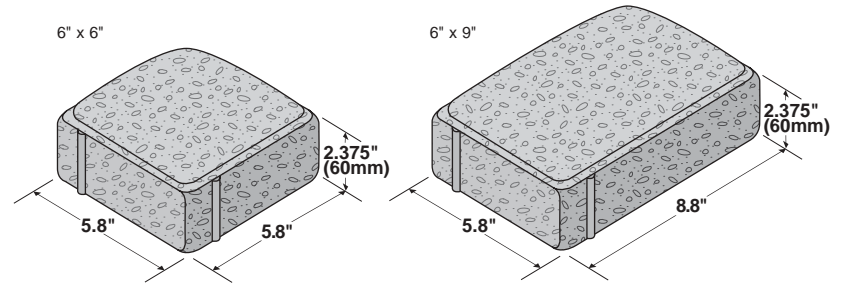

SIZE	UNITS/SQ. FT.	SQ. FT. PALLET/STRAP	UNITS PALLET/STRAP	WEIGHT/PALLET
5.8" x 5.8" x 2.375" (60MM)	4.25	105/13.1	432/54	2,730 LBS
5.8" x 8.8" x 2.375" (60MM)	2.8	109/21.8	300/60	2,830 LBS

This flexible paver shape incorporates rounded corners and subtly indented chamfers giving the user the option of using Cobble in both contemporary and traditional designs. By using a combination of the two sizes, a variety of patterns are possible.




*The classic "old-world" look of Cobble complements traditional design.*

## SPECIFICATIONS


Cobble is produced using a “no-slump” concrete mix, made under extreme pressure and high frequency vibrations. Unit pavers will meet or exceed the requirements established in the ASTM C936 (standard specification for interlocking concrete paving units). Requirements of this standard include an average compressive strength of 8,000 psi, average absorption no greater than 5%.

## LAYING PATTERNS


*PATTERN 1*  
100% RECTANGLES

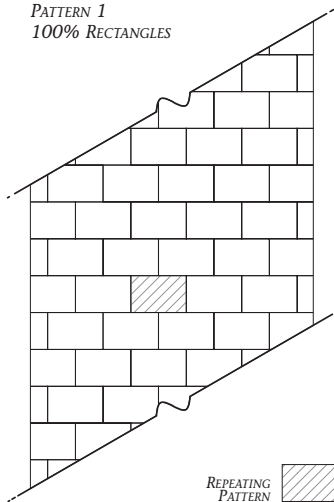


*PATTERN 2*  
40% SQUARES  
60% RECTANGLES

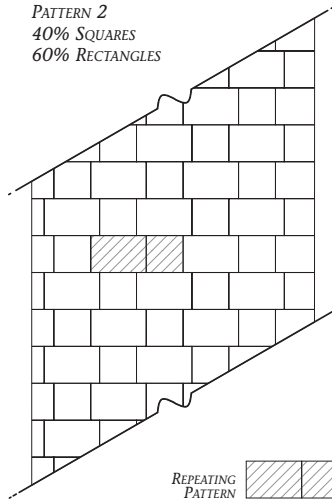


*PATTERN 3*  
13% SQUARES  
87% RECTANGLES

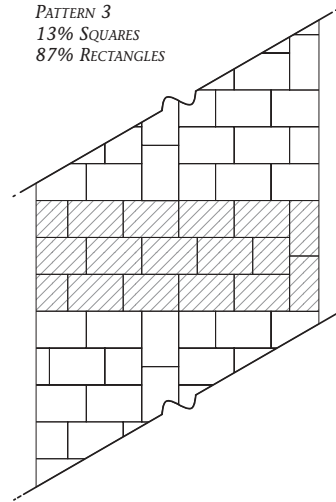


*PATTERN 4*  
25% SQUARES  
75% RECTANGLES

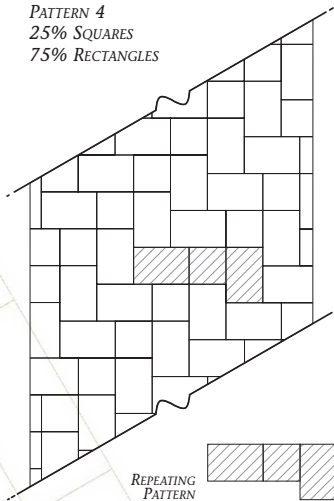

*PATTERN 5*  
40% SQUARES  
60% RECTANGLES

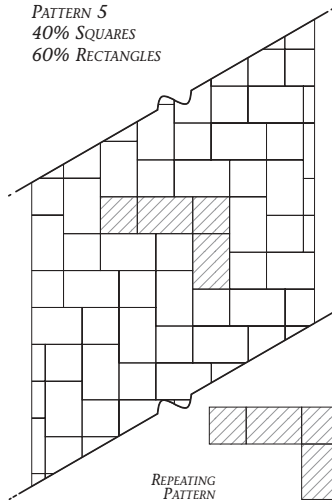

*PATTERN 6*  
27.5% SQUARES  
72.5% RECTANGLES

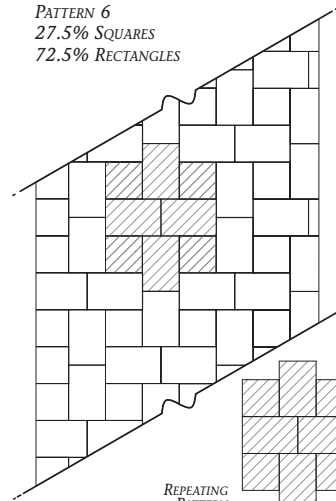

Proudly Distributed by:



[www.romanstone.com](http://www.romanstone.com)



For ICPI Technical Notes  
visit [www.romanstone.com](http://www.romanstone.com)