




ROMANSTONE®
INTERLOCKING PAVING STONES

HOLLAND-STONE

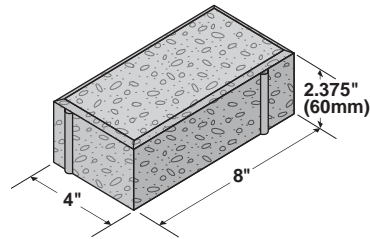

SIZE	UNITS/SQ. FT.	SQ. FT. PALLET/STRAP	UNITS PALLET/STRAP	WEIGHT/PALLET
4" x 8" x 2.375" (60MM)	4.5	120/20	540/90	3,120 LBS
4" x 8" x 3.125" (80MM)	4.5	96/16	432/72	3,300 LBS

Holland-Stone has the renowned durability of interlocking paving stones, yet offers the old world charm of a simple brick shape in paving. This simple rectangular stone can be applied in a number of fascinating patterns (like the popular herringbone pattern) to produce warm, luxurious textures. Mix these patterns with any of the available standard colors or combination of colors and you've got the potential for an architectural effect only your imagination can limit.




A simple running bond pattern helps create a tranquil setting.

SPECIFICATIONS


Holland-Stone is produced using a “no-slump” concrete mix, made under extreme pressure and high frequency vibrations. Unit pavers will meet or exceed the requirements established in the ASTM C936 (standard specification for interlocking concrete paving units). Requirements of this standard include an average compressive strength of 8,000 psi, average absorption no greater than 5%.

LAYING PATTERNS


BASKET WEAVE

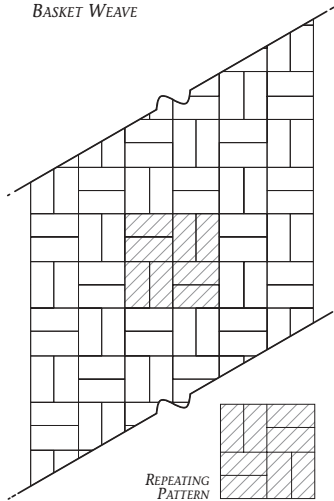


RUNNING BOND

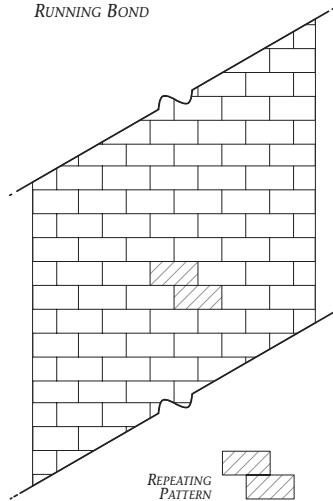

HERRINGBONE 90°

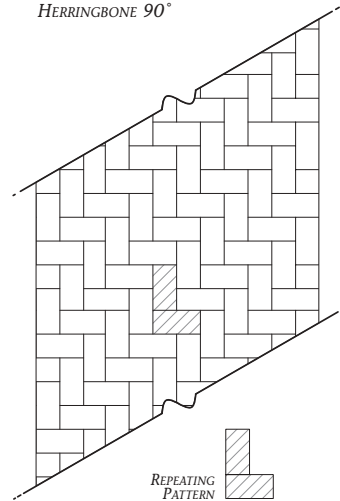

HERRINGBONE 45°

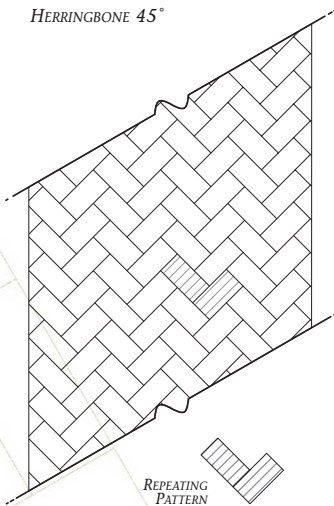

Proudly Distributed by:



www.romanstone.com



For ICPI Technical Notes
visit www.romanstone.com