




ROMANSTONE®
INTERLOCKING PAVING STONES

UNI-DECOR®

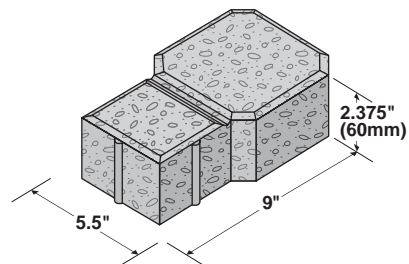

AUTUMN HICKORY BLEND

HARVEST BLEND

TERRA COTTA BLEND

TIMBERWOOD BLEND

SIZE	UNITS/SQ. FT.	SQ. FT. PALLET/STRAP	UNITS PALLET/STRAP	WEIGHT/PALLET
5.5" x 9" x 2.375" (60MM)	3.5	114/22.8	400/80	2,900 LBS
5.5" x 9" x 3.125" (80MM)	3.5	91/18.2	320/64	3,100 LBS

For a simple paver with an attractive, easily-installed pattern choose Uni-Decor. The two different but compatible shapes that make up the Uni-Decor paver style allow for a pleasing pattern with absolute simplicity of installation. For a diamond-like pattern try installing Uni-Decor at a 45° angle to the edge of your installation.




Uni-Decor combines two distinct shapes in one paver for a timeless pattern.

SPECIFICATIONS

Uni-Decor® is produced using a “no-slump” concrete mix, made under extreme pressure and high frequency vibrations. Unit pavers will meet or exceed the requirements established in the ASTM C936 (standard specification for interlocking concrete paving units). Requirements of this standard include an average compressive strength of 8,000 psi, average absorption no greater than 5%.

LAYING PATTERNS

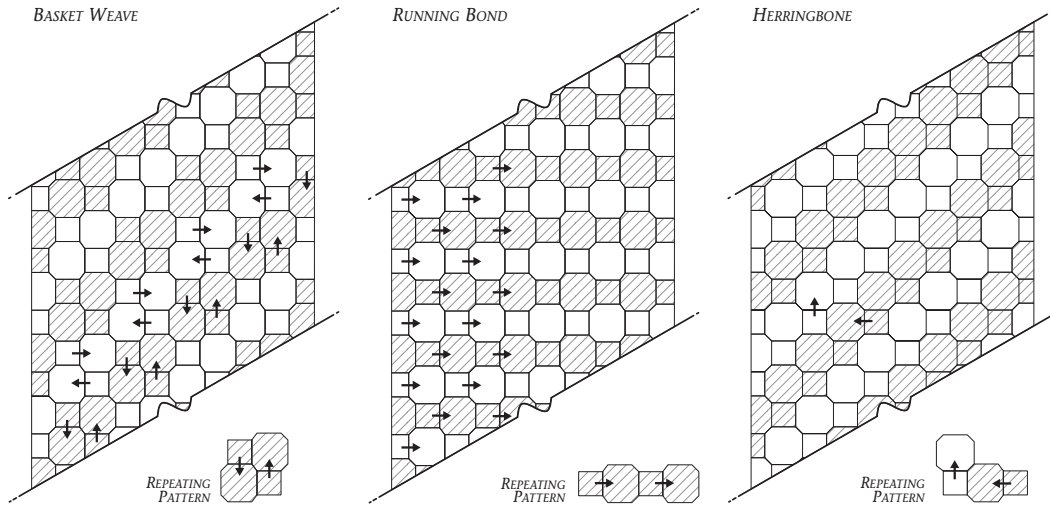

Proudly Distributed by:



www.romanstone.com



For ICPI Technical Notes
visit www.romanstone.com