

HIGHLAND STONE[®] 6"/3" WALL SYSTEMS

For an easy-to-install random, multiheight look, two popular Anchor[™] products can be combined in the Sequent[™] retaining wall panel system with great aesthetic and functional results. The Sequent panels are a quick way to build a multiple-height wall by combining the Highland Stone[®] 6" and 3" multipiece retaining wall systems in a panel installation pattern. These panels break up the horizontal lines of a typical single-height product and can be used with geosynthetic reinforcement or with the Anchorplex[™] retaining wall system. The Sequent installation pattern is simple to install on a large scale and provides a random, rough-textured look.



6" Units	Large**	Medium	Small
Approximate Dimensions*	6" x 18" x 12"	6" x 12" x 12"	6" x 6" x 12"
Approximate Weight*	78 lbs.	59 lbs.	30 lbs.
Coverage	0.75 sq. ft.	0.50 sq. ft.	0.25 sq. ft.
Setback/System Batter	1 1/8" / 10.6°	1 1/8" / 10.6°	1 1/8" / 10.6°



3" Units	Large	Medium	Small
Approximate Dimensions*	3" x 18" x 11 1/2"	3" x 12" x 11 1/2"	3" x 6" x 11 1/2"
Approximate Weight*	41 lbs.	28 lbs.	14 lbs.
Coverage	0.38 sq. ft.	0.25 sq. ft.	0.13 sq. ft.
Setback/System Batter	9/16" / 10.6°	9/16" / 10.6°	9/16" / 10.6°




Accessory Units	XL™ Cap	Step
Approximate Dimensions*	Front, 3" x 18" x 13" Back, 3" x 12" x 13"	6" x 16" x 12" 6" x 16" x 12"
Approximate Weight*	44 lbs.	89 lbs.
Coverage	1.25 lin. ft.	

See anchorwall.com for installation instructions.

No pins. No mortar.
No misalignments.

Rear-lip locator, invented by Anchor, makes installation fast and accurate. Anchor – the original rear-lip product!

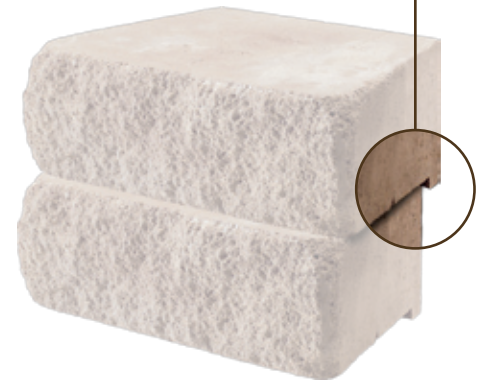

*Product dimensions are height by face length by depth. Actual dimensions and weights may vary from these approximate values due to variations in manufacturing processes. Specifications may change without notice. See your Anchor representative for details, color options, block dimensions and additional information.
**Large unit features a partial core.


HIGHLAND STONE® 6" / 3" WALL SYSTEMS

SEQUENT™ INSTALLATION PATTERN

Combine the Highland Stone® 6" and 3" wall systems to construct a multiple-height wall with the easy-to-use Sequent™ panel installation pattern. This panel approach breaks up the horizontal lines of a typical single-height product. The repeating Sequent installation pattern is easy for contractors to install on a large scale in order to create a random, rough-textured look.

27-INCH BY 6-FOOT PANEL INSTALLATION PATTERN

This 27-inch-high by 6-foot-long installation pattern uses an equal number of units of each face size to make a panel. This installation pattern is one of many possible options. Others can be used for different appearances.

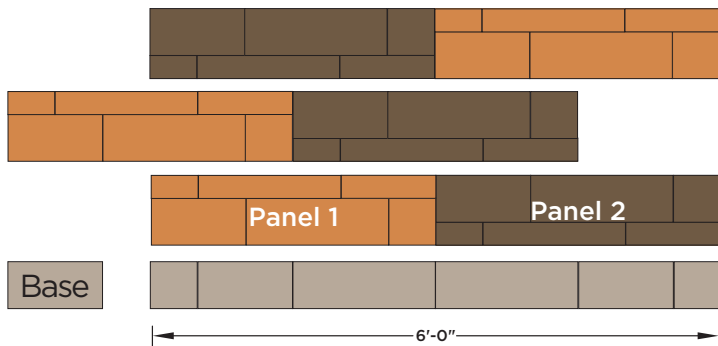


INSTALLATION GUIDELINES

Install the base course using best practices. The wall is built with a series of panels in a repeating installation pattern. Install filter fabric behind wall.

Follow these steps to build panels.


- 1 Start by using all three units of 6-inch product.




- 2 Next, use all three units of the 3-inch product and stack them on the first three units, staggering the bond. This completes panel one. (See orange-colored area in Installation Pattern.)



- 3 Working along the wall, next use all three units of the alternate-sized product.



- 4 Use alternate product and stack units on the course described in Step 3, staggering the bond. This completes the second panel. (See brown-colored area in Installation Pattern). Repeat panel installations across the base course.



- 5 Backfill, compact and install grid or structural backfill, if needed.

- 6 Start the next set of panels by staggering the first unit 18 inches to the right or left of lower panels and repeat Step 1.

Continue to install panels to complete the wall.

